



ROOFTOP LMK-SRL65-M6-E



LMK-SRL65-M6-E

The LMK-SRL65-M6-E is a taller short rail, locally manufactured and designed for narrow-crest IBR roofs. It features three M6 mounting holes for secure, user-friendly installation.

Application	Suitable for all standard IBR profiles, with specific design optimisation for narrow-crest IBR (≥ 20 mm)
Key Features	• Fast and easy to install • EPDM layer for a water-resistant seal. • Cost-effective due to minimal material use. • Compatible with grounding washer, mid and end-clamps. • Locally produced
Material	Aluminium 6005-T5 / 6063-T6, EPDM
Product Type	Pierced Fix
Specifications	Tumbled / Mill Finish
Dimensions	H 67 mm x L 100 mm x W 41.2 mm
Total Weight	120 g
Orientation	Landscape

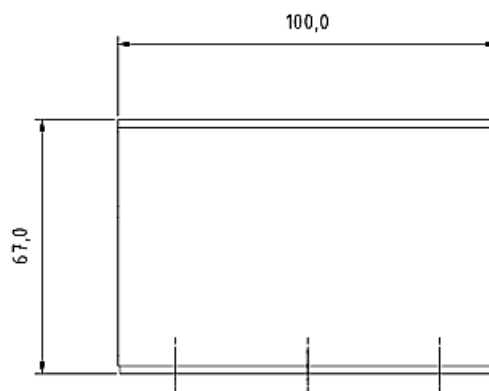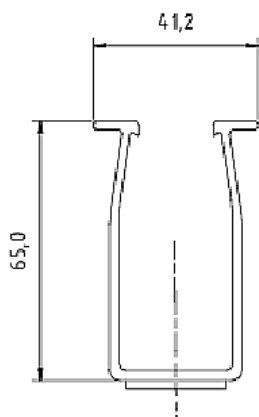

Excellent Sheet Clearance

The elevated design of the LMK-SRL65-M6-E provides excellent sheet clearance, while the included EPDM gasket prevents leaks.



Easy Installation

The LMK-SRL65-M6-E comes pre-punched with M6 holes for easy screw installation, making it a reliable choice for secure mounting.